
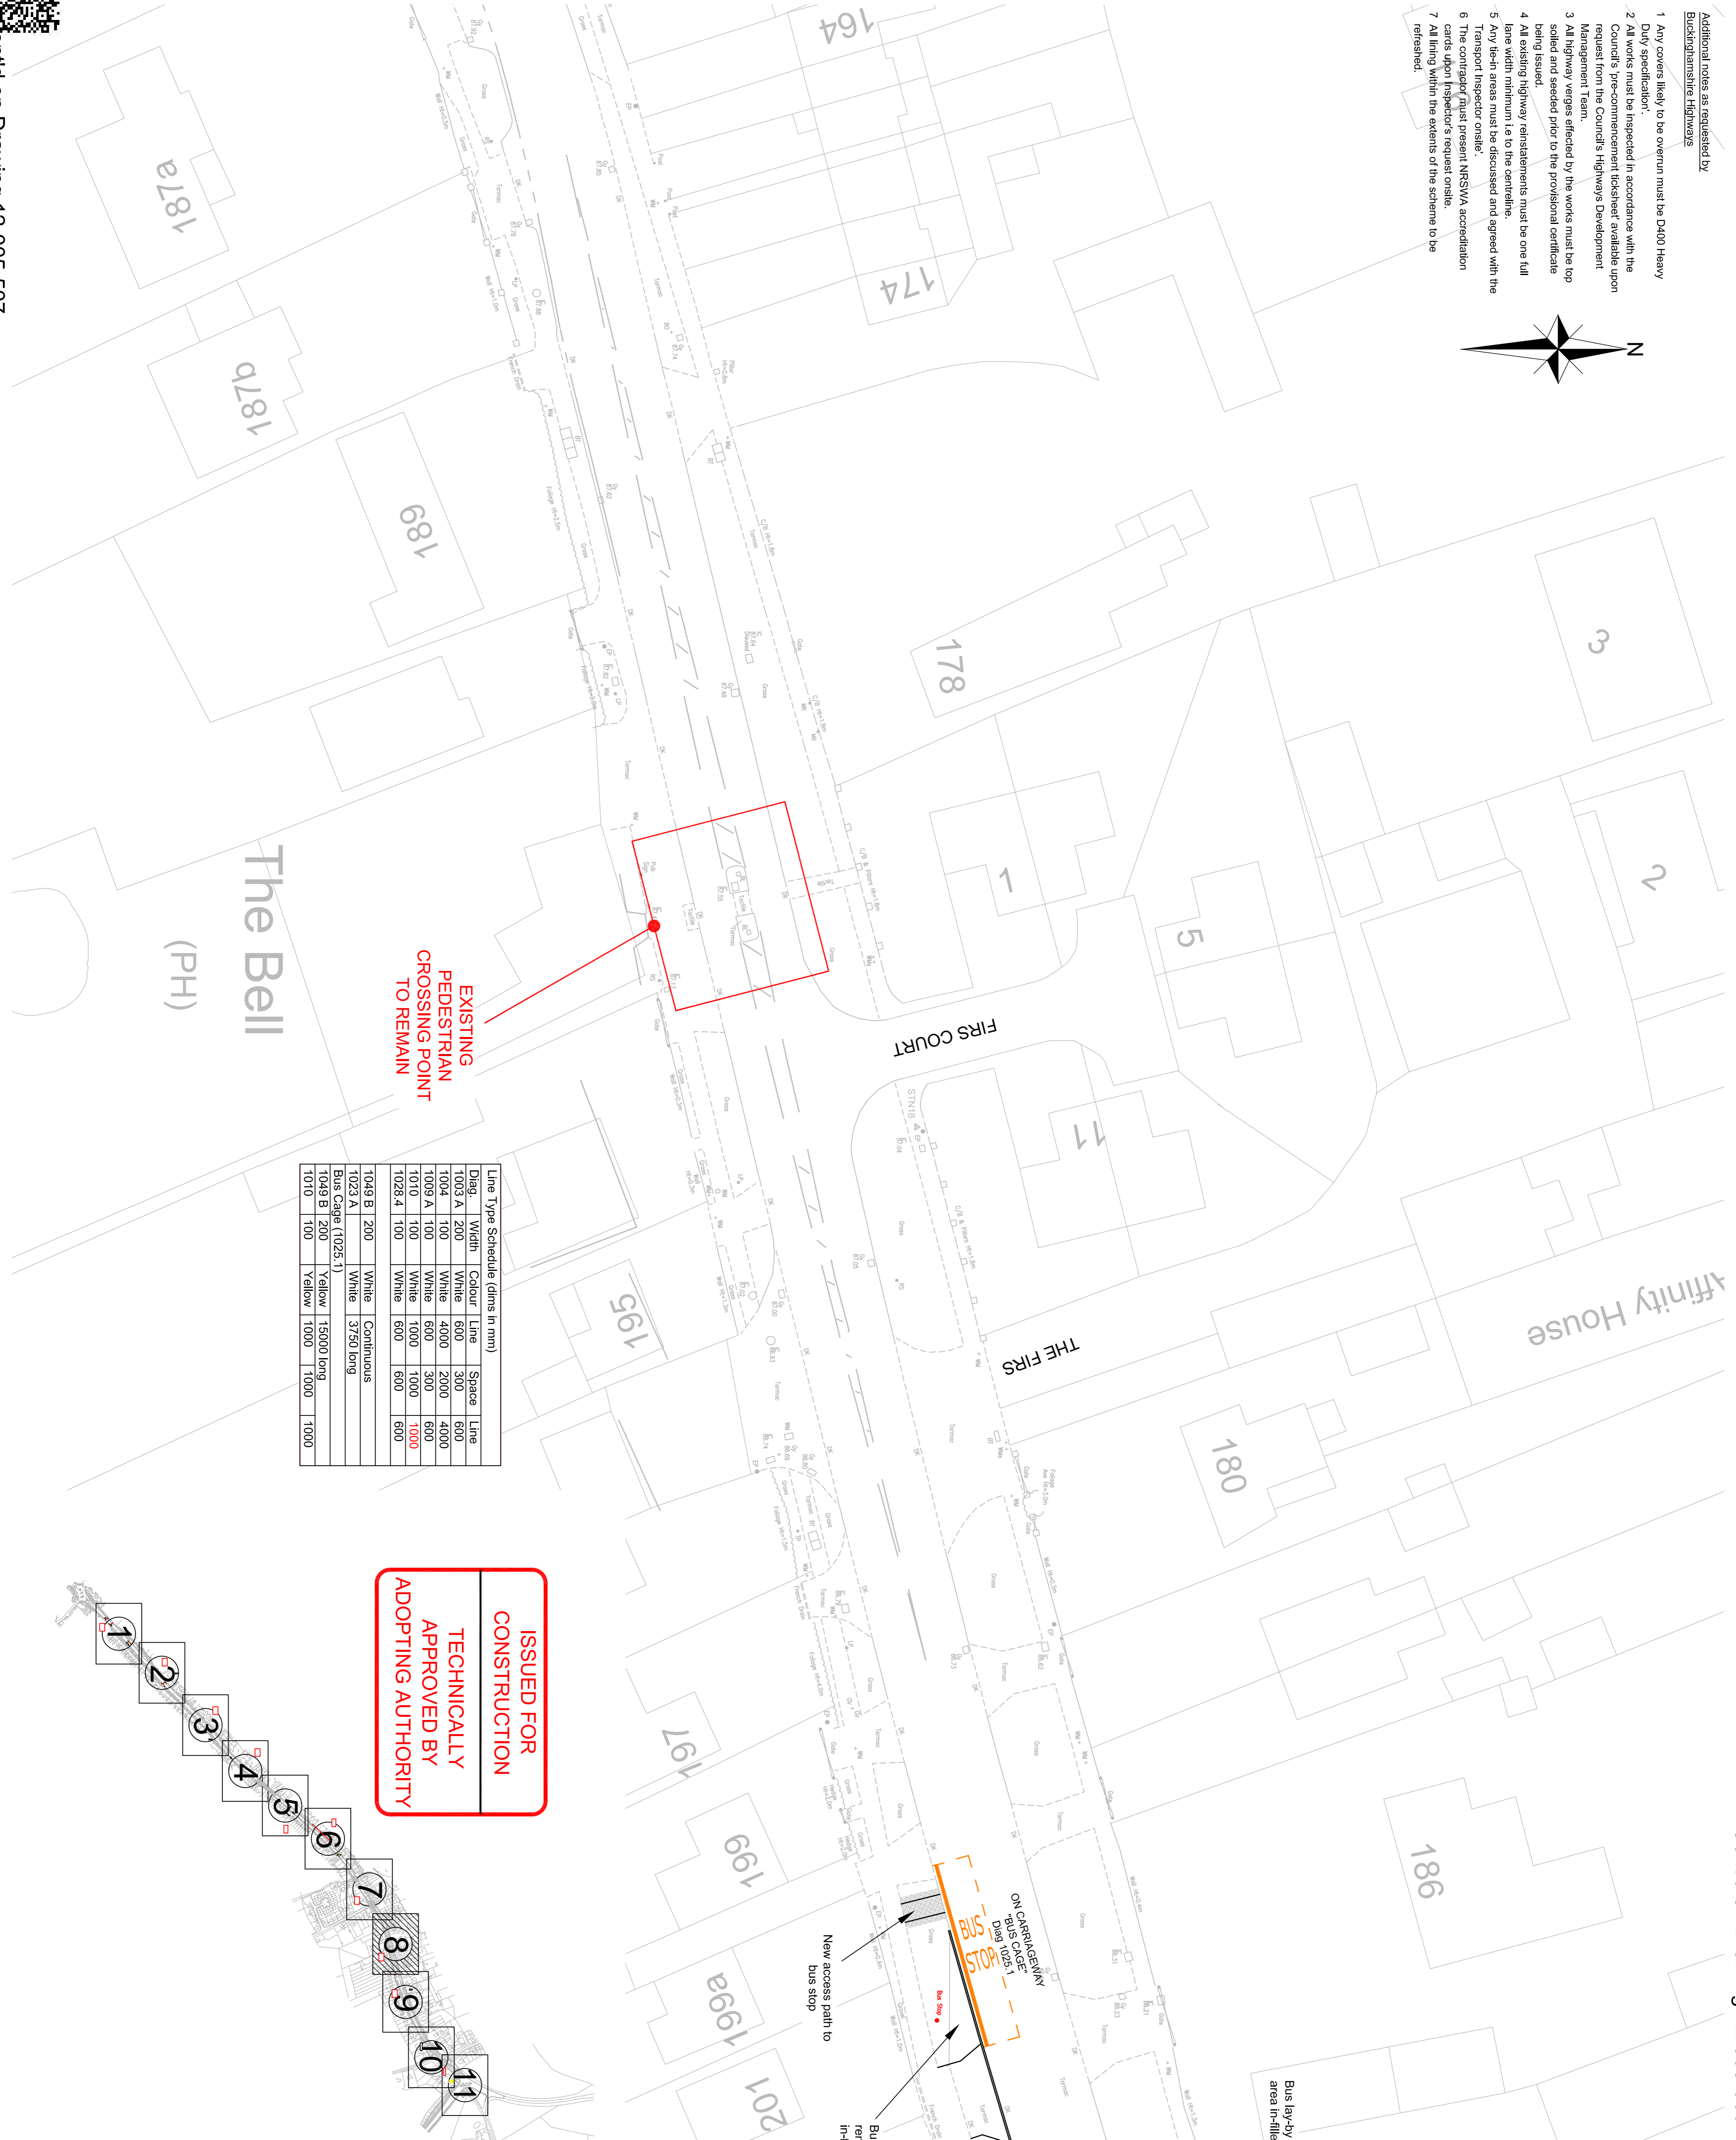


- Additional notes as requested by Buckinghamshire Highways
- 1 Any covers likely to be overrun must be D400 Heavy Duty specification.
 - 2 All works must be inspected in accordance with the Council's pre-commencement checklist available upon request from the Council's Highways Development Management Team.
 - 3 All highway verges affected by the works must be top soiled and seeded prior to the provisional certificate being issued.
 - 4 All existing highway reinstatements must be one full lane width minimum i.e to the centreline.
 - 5 Any kerb areas must be discussed and agreed with the Transport Inspector onsite.
 - 6 The contractor must present NRSWA accreditation cards upon Inspector's request onsite.
 - 7 All lining within the extents of the scheme to be refreshed.

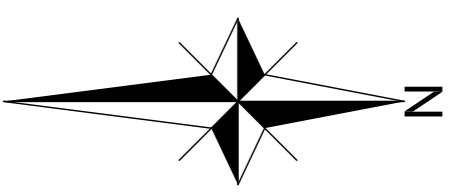

Diag.	Type	Width	Colour	Line	Space	Line
1003 A	200	White	600	300	600	
1004	100	White	4000	2000	4000	
1009 A	100	White	600	300	600	
1010	100	White	1000	1000	1000	
1028.4	100	White	600	600	600	
1049 B	200	White	Continuous			
1023 A	White	3750 long				
1049 B	200	Yellow	15000 long	1000	1000	
1010	100	Yellow	1000	1000	1000	

ISSUED FOR CONSTRUCTION
TECHNICALLY APPROVED BY
ADOPTING AUTHORITY

- NOTES
1. This drawing is to be read in conjunction with the relevant specification and the following drawings:- 12-005-501 to 12-005-507 and 12-005-509 to 12-005-511 - General Arrangement Layouts.
 2. All materials and workmanship shall comply fully with the Manual of Contract Documents for Highways Works, Specification for Highways Works Volume 1 and the Buckinghamshire County Council Specification for Road Construction and Standard Details.
 3. Refer to drawings 12-005-512 to 12-005-522 inclusive for Site Clearance Plans.
 4. Refer to drawings 12-005-523 to 12-005-533 inclusive for Surface Finishes Plans.
 5. Refer to drawings 12-005-534to 12-005-544 for the Existing Services Plans.
 6. DO NOT scale from this drawing. Work from figured dimensions and Setting Out Information ONLY.

Rev	Amendments	Dwn	Chk	Appr	Date
D	Issued for Construction - Technically approved	EV	GG	GG	July 24
C	Using table amended following Technical	EV	GG	GG	July 24
B	Amended following technical Comments 2 from BC Highways	EV	GG	GG	July 24
A	Amended following comments from BC Highways	EV	GG	GG	May 24



Issued by Drawn by
 Paul Beebe
 Senior Manager
 01295 27000
 paul.beebe@charlesandassociates.com
 www.charlesandassociates.com

Job Title
Kingsbrook, Aylesbury
Bierton Traffic Calming Measures

Drawing Title
General Arrangement Layout
 8 of 11

Client
BDW North Thames Ltd

Scale	Date	Designed
1:250 @ A1	Jan 24	GG
Drawn	Checked	Approved
EV	GW	GAC
Job No	C & A Drawing No	Rev
12-005	12-005-508	D
Client Drawing No	12-005-H6700-D2-508	

